


English

AFTI 40

Hotel Telephone



User guide

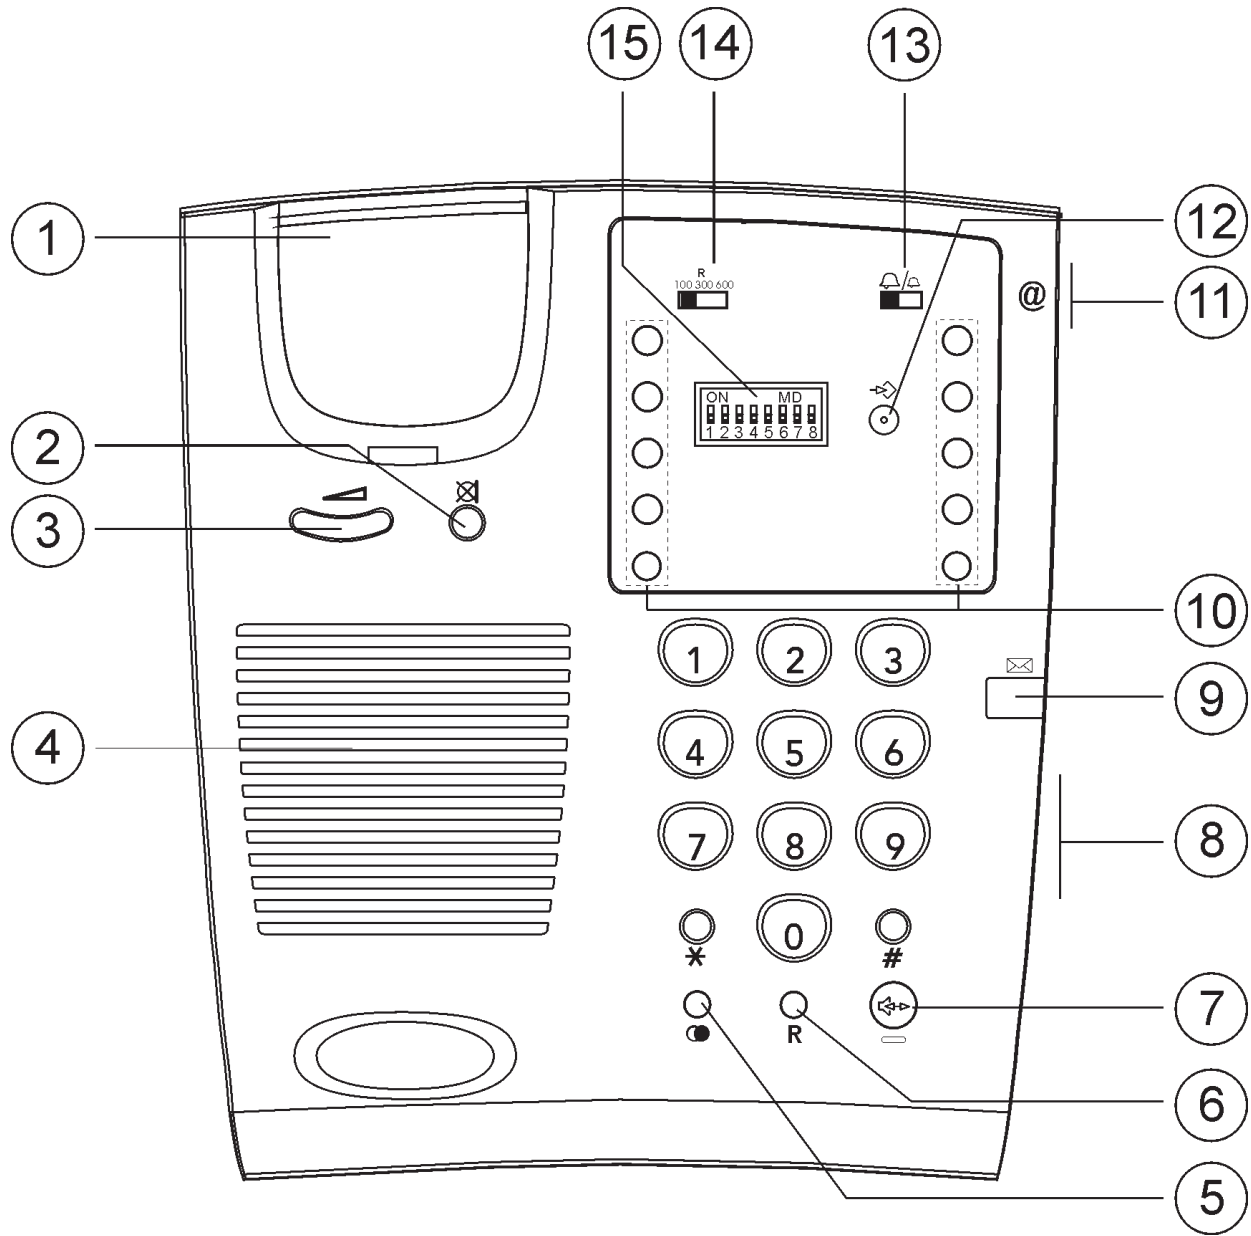



- 1 Hook switch
- 2 Mute Button
- 3 Volume Control for Handset
- 4 Speaker
- 5 Redial Button
- 6 Recall (R) Button
- 7 Speaker button and LED
- 8 Volume Control for Speaker

- 9 MW Indicator
- 10 Direct Memory Buttons
- 11 Extension Port
- 12 Store Button
- 13 Ringer Switch
- 14 Recall Time Selector
- 15 MW Selector Switches

Operation

Connection

1. Connect the curly cord to the handset and to the socket marked .
2. Connect the telephone cord to the socket marked , and then to the telephone network socket. The modular plug will click when correctly put into place.
3. Pick up the handset and listen for the dial tone.

IMPORTANT!

The earpiece of the handset may attract small ferromagnetic objects such as staples and pins, care should be taken when placing the handset near these items.


Wall Mounting



To wall-mount the telephone, first detach the table support by placing thumbs at either end of the support and pushing towards the rear/top side of the telephone. It can now be mounted directly to an existing wall plate or by fixing two screws in the wall, positioned vertically 100 mm apart. These screws will fit into the two 'keyholes' at the back of the telephone.


Hearing Aid Compatible

This telephone is hearing-aid compatible. Select the T mode on your hearing aid to enable this feature.

Group Listening

During a call, it is possible to activate the Group Listening function by pressing . With this function activated, the call can be heard from the speaker on the base unit as well as from the handset. That way, anyone in the same room as the base unit will be able to hear both parties and follow the conversation.

1. Dial the number as usual.
2. Once the call has been connected, press  to activate the Group Listening function. The conversation can then be heard via the speaker. The speaker indicator will illuminate while the Group Listening function is active.
3. Adjust the volume, if needed, using the volume control on the side.
4. To deactivate the Group Listening function, press  once again.



The speaker can also be used for hands free dialling. Press , then dial the number and pick up the handset when the call is answered. Remember that there is a microphone in the handset only.

Operation


Mute Button


The microphone is disabled while the  button is held down.

Redial Button

If the number dialled is engaged, or if you wish to redial the last number dialled, lift the receiver (or press the  button) and press the redial button .

Volume Controls

The handset earpiece volume may be adjusted during a call using . Press the right side of the button to increase the volume, the left side to decrease it.

The base speaker volume is adjusted with the  control on the side of the base.


Labels/protective cover

A set of labels are included with this product. The Hook Switch memory label can be used for displaying information of a more temporary kind, whereas the label under the protective cover is to be used for more permanent information, such as instructions regarding room service, wake-up calls, laundry, etc.

To reduce the possibility of tampering with the label or its information, the protective cover is designed to be quite difficult to remove. Remove it by pressing the button located under the table support (after detaching the support). Keep the button depressed, while pulling the cover upward.

To remove the Hook Switch label, use a thin instrument to remove it from its holder, and to put it back in. The Hook Switch itself cannot be opened.

Connection of additional equipment

Additional equipment such as modems or cordless phones can be connected to this telephone via the  socket on the right side of the base.


Two methods of operation can be selected by using the 1:2 switch located on the underside of the base:

1. allows for single line parallel operation. For example, a computer modem can be operated through the telephone but only one device can be operated at a time, either the modem or the telephone.
2. allows for two line operation where a computer modem can be connected via the telephone and both devices can be used at the same time. The network wall socket must have two lines connected.



Settings

Memory


This telephone has 10 Direct dialling memories.


Once a number has been stored in a memory location, you need only to press one button to make the call. The store button  is located under the protective cover.

Storing Direct Memory Numbers

1. Lift the handset (ignore the dialling tone) and press store button  using a pointed instrument .
2. Enter telephone number (up to 32 digits).
3. Press  again.
4. Select memory position by pressing the corresponding button.
5. Replace the handset. The number is now stored.

Using Direct Memory Dialling

1. Lift the handset (or press the  button) and wait for a dialling tone.
2. Press the direct memory button required.

Press  to insert a pause in the telephone number.

In case of a number change, store the new number in the location of the old one.

The Direct Memories are retained even when the telephone is disconnected.

Technical information



Beneath the protective cover and its label are switches to select operational parameters of the telephone when connected to different types of PBX. Refer to page 5 for instructions to remove the protective cover.


NB: These switches should only be adjusted by qualified personnel.

Recall Button Timing

There are three different Recall Button Timings available: 100/300/600 ms.

Ringer

Using the switch , the Ringer volume can be set to two different levels. Also the melody can be set with  underneath the telephone



Message Waiting Indicator

Some PBX systems use a function called Message Waiting. The telephone can indicate that there are voice mail messages by selecting the appropriate method for your system. Please contact your system administrator for more information. Pairs of switches must be set to the ON position for compatibility with the following MW systems:

1 & 2: Line Reversal.

3 & 4: Visual Ring Indicator.

5 & 6: High voltage (NEON). Also Visual Ring Indicator.

7 & 8: Not Used, must be set to Off position.

Troubleshooting

Check that the telephone cord is undamaged and properly plugged in.

Disconnect any additional equipment that may be connected. If the problem is resolved, the fault is with the other equipment.

Test the equipment on a known working line. If the product works then the fault is with the line.

If you are still experiencing difficulties, contact the place of purchase.

Other

Australia and New Zealand

If you believe this product is malfunctioning, please refer to the relevant section and/or consult the troubleshooting guide in this manual to ensure that you have followed the instructions carefully. As an alternative you can visit our web site for FAQ's or send an e-mail for a prompt reply.

Guarantee

This product is guaranteed for a period of 12 months from the date of purchase. Should you experience difficulties with the product, please contact us for assistance. If the product is then found to be faulty you will be asked to return it directly to us with a copy of the purchase receipt.

This guarantee shall not apply to a fault caused by an accident or a similar incident or damage, liquid ingress negligence, abnormal usage or any other circumstances on the purchaser's part. Furthermore, this guarantee shall not apply to a fault caused by a thunderstorm or lightning, excessive or any other voltage fluctuations or faults on the telephone line. (As a matter of precaution, we recommend disconnecting the telephone during a thunderstorm).

This guarantee does not affect your statutory rights.

AUSTRALIA

DORO Australia Pty Ltd
PO Box 6760
Baulkham Hills BC NSW 2153
Australia

NEW ZEALAND

Atlas Gentech (NZ) Limited
Private Bag 14927
Panmure
Auckland
New Zealand

Consumer Support

Ph: (02) 8853 8444
Fax: (02) 8853-8489
Email: support@doro.com.au
Web site: www.doro.com.au

Consumer Support

Ph: 0900 500-25 (Toll Call)
Fax: (09) 574-2722
Email: support@atlasgentech.co.nz

Technical Support

Technical information

REN (RN for New Zealand)

The REN (Ringer Equivalence Number) or (RN) is of significance only if you wish to connect more than 1 telephone to your telephone line. A standard telephone line has a maximum REN capacity of 3 (RN of 5). It is possible to connect 3 devices with a REN of 1 (RN of 1) with no degradation to the product's performance. Exceeding this limit may cause the volume of the ringer in any phone to decrease or not ring at all.

Notes for operation in New Zealand

The grant of a Telepermit for any item of terminal equipment indicates only that Telecom has accepted that the item complies with the minimum conditions for connection to its network. It indicates no endorsement of the product by Telecom, nor does it provide any sort of warranty. Above all, it provides no assurance that any item will work correctly in all respects with another item of Telepermitted equipment of a different make or model, nor does it imply that any product is compatible with all of Telecom's network services.

This equipment shall not be set to make automatic calls to the Telecom "111" Emergency Service.

This equipment may not provide for the effective hand-over of a call to another device connected to the same line.

This equipment should not be used under any circumstances that may constitute a nuisance to other Telecom Customers.

UK

If you cannot resolve the fault using the faultfinder section, technical support is available on the **Premium Rate Number: 0906 302 0114**.

Calls cost **50 pence per minute** (prices correct at the time of going to press), and is operational between 9AM - 5PM Monday-Friday excluding Bank Holidays. Alternatively,

E-mail on: tech@doro-uk.com

You can contact us in writing: Consumer Support Group, Doro UK Ltd., 22 Walkers Road, North Moons Moat, Redditch, Worcestershire, B98 9HE, (regarding any Spares or Technical query), or

Telephone (Spares only): 01527 584377

Web site: www.doro-uk.com





DECLARATION OF CONFORMITY

WE DORO AB
Of SKIFFERVÄGEN 80
SE-224 78 LUND
SWEDEN

AS THE EU/EES/EC/EEA AUTHORISED REPRESENTATIVE DECLARE
UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT

MODEL: AFTI 40
DESCRIPTION: ANALOGUE TELEPHONE

IS IN CONFORMITY WITH DIRECTIVE: 1999/5/EC

Authorised by:

Signed

Name (printed): PETER CULLIN
Position in company: R&D MANAGER
Date of issue: 2001-06-19

Copies of this document will be held on file for a period of 10 years after the last production.



Supplier: DORO AB, Skiffervägen 80, SE-224 78 LUND, SWEDEN
Product: AFTI 40

This product is intended for connection to analogue PSTN lines within the following countries: United Kingdom, Switzerland, Sweden, Norway, Denmark, Finland and France.

However, due to differences between the individual PSTN's provided in the different countries, the approval does not, of itself, give an unconditional assurance of successful operation on every PSTN network termination point.

ADDITIONAL INFORMATION

Pulse dialling option in France only.



www.doro.com