

iBaby monitor

Model: M3

User Manual

“The manufacturer is not responsible for any legal liability caused by negligence.”

Index

1	INTRODUCTION	4
1.1	PACKAGE CONTENTS	4
1.2	FUNCTION AND FEATURES.....	4
1.3	PRODUCT SPECIFICATIONS	5
2	APPEARANCE AND INTERFACE	6
2.1	APPEARANCE	6
2.2	BACK PANEL OF THE iBABY MONITOR	7
3	ACCESSING THE iBABY MONITOR OVER A LOCAL AREA NETWORK	7
3.1	LOCAL AREA NETWORK CONNECTION.....	7
3.2	ACCESSING THE iBABY MONITOR FROM AN IPOD TOUCH, IPHONE OR IPAD	8
3.3	CONFIGURING THE iBABY MONITOR FROM A WINDOWS OC: IP ADDRESS.....	8
3.4	ACCESSING THE iBABY MONITOR FROM A PC.....	10
4	ACCESSING THE iBABY MONITOR OVER THE INTERNET	13
4.1	INTERNET CONNECTION	13
4.2	PORT FORWARDING	13
4.3	DDNS.....	13
4.3.1	<i>Manufacturer's DDNS</i>	13
4.3.2	<i>Third Party DDNS</i>	14
5	OTHER SETTINGS	15
5.1	NETWORK SETTINGS.....	15
5.1.1	<i>Basic Network Settings</i>	15
5.1.2	<i>WiFi Settings</i>	15
5.1.3	<i>ADSL Settings</i>	16
5.1.4	<i>UPnP Settings</i>	16
5.1.5	<i>DDNS Settings</i>	17
5.1.6	<i>MSN Settings</i>	17
5.2	ALARM SETTINGS	17
5.2.1	<i>Alarm Settings</i>	17
5.2.2	<i>Mail Service Settings</i>	19
5.2.3	<i>FTP Service Settings</i>	20
5.2.4	<i>Alarm Server</i>	21
5.3	ADVANCED SETTINGS	21
5.3.1	<i>User Settings</i>	21
5.3.2	<i>Multi Device Settings</i>	22
5.3.3	<i>Other Settings</i>	22
5.4	MAINTAINENCE	23 ERROR! BOOKMARK NOT DEFINED.

5.4.1	<i>Device Information</i>	23
5.4.2	<i>Time Setting</i>	23
5.4.3	<i>Firmware Upgrade</i>	24
5.4.4	<i>Restore Factory Default</i>	24
5.4.5	<i>User Browsing Log</i>	24
6	CENTRALIZATION CONTROL	24
7	FAQ	25

1 Introduction

Your iBaby monitor combines a high-quality digital camera with network connectivity and a clear image to your iPod Touch, iPhone or iPad, or to a PC. You can connect from a Local Area Network or over the Internet.

1.1 Package contents

- ✓ Camera
- ✓ User manual and utility CD
- ✓ Power adapter
- ✓ Bracket
- ✓ Cable
- ✓ Antenna
- ✓ Quick installation guide
- ✓ Set of screws

1.2 Function and Features

- ✓ Supports 802.11b/g/n protocols for wireless monitoring.
- ✓ Supports TCP/IP network protocols with a built-in Web server. Users can view streaming video from an iBaby Monitor using an iPod Touch, iPhone or iPad, as well as from a PC running Internet Explorer or similar browsers.
- ✓ A built-in microphone allows users to listen to the room being monitored. Users can also connect the camera to a speaker to support a two-way intercom.
- ✓ The iBaby monitor's pan/tilt function allows horizontal panning of 350° and vertical movement of 70°.
- ✓ The design is attractive and the device is easy to install and use.
- ✓ Infrared LED for night vision covers 16 feet (5 meters) of area, for 24-hour monitoring, even in the dark.
- ✓ Motion detection, sound detection and alert pins can be connected to external sensors for warnings.
- ✓ A record of alarms can be sent via email, and also stored on a server.
- ✓ Supports Universal Plug and Play (UPnP), allowing for automatic router port forwarding.
- ✓ A Dynamic Domain Name Service (DDNS) address provided with the camera, with an easy-to-read label at the bottom of each unit, allowing users to monitor their iBaby monitor over the Web.

1.3 Product Specifications

Image Capture	Sensor	CMOS sensor
	Total pixels	300k
	Minimum illumination	0 Lux(IR on automatically)
	Lens	f=3.6mm, F=2.0, Fixed iris
Pan/Tilt	Pan coverage	350°
	Tilt coverage	70°
Assistant	Lighting	10pcs 850nm infrared LEDs, 16 feet (5 meters) of distance
	Lighting control	Auto control
Video and Audio	Resolution	640*480(VGA)/320*240(QVGA)/160*120(QQVGA)
	Compression	MJPEG
	Frame rate	30 fps
	Bit rate	128 kbps ~ 5 Mbps
	Image rotation	Mirror /Flip
	Audio compression	ADPCM
Network	Basic protocols	TCP/IP, UDP/IP, HTTP, SMTP, FTP, DHCP, DDNS, UPnP, NTP, PPPOE
	Other protocols	802.11b/g/n
Other Features	Video control	Supported
	Dual-way audio	Supported
	Motion detection	Supported
	Sound detection	Supported
	Triggered actions	Email/FTP/external alarm/send message to alarm server
	User access authority	Three levels
	Date / time setting	Supported
	Upgrades	Upgrade over the network
	DDNS	Included
Hardware Interface	Ethernet	10Base-T/100base-TX
	Alarm in	1 channel
	Alarm out	1 channel
	Audio in	Internal Mic and External Mic socket x 1
	Audio out	Audio Line-out socket x 1
Physical Index	Weight	11.5 ounces (358 grams)
	Main body	111mm(L) X 110mm(W) X 126mm(H)

	Power	DC 5V
	Power consumption	<6W
	Operating temperature	104°F (0°C ~ 40°C)
	Operating humidity	10% ~ 80% non-condensing
Software (iPod Touch, iPhone or iPad)	iOS 4.0 or later	Can be downloaded for free from the Apple App store
Software (PC)	OS Supported	Microsoft Windows 98, 2000, XP, Vista, Windows 7 or higher. iOS 4.0 or later
	Browser	Internet Explorer 6.0 or higher, or equivalent browser, such as Firefox.
	Application software	IPCMonitor.exe included

2 Appearance and interface

2.1 Appearance



Figure 1

2.2 Back panel of the iBaby monitor

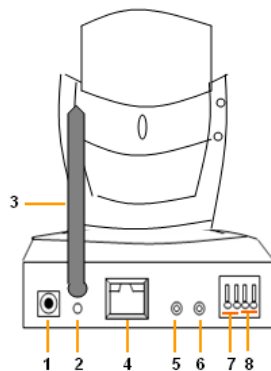


Figure 2

- 1) **Power Input Socket:** Connection for power adaptor. The adaptor's output is 5 volts, 1.5 amps.
- 2) **RESET Button:** Press the RESET button and hold for 10 seconds. The iBaby monitor will restart with its factory default settings restored.
- 3) **Wi-Fi Antenna Connector:** For installing a Wi-Fi antenna.
- 4) **RJ45 Ethernet Socket:** The RJ45 Ethernet socket automatically configures itself for speeds of either 10 MB or 100 MB.
- 5) **Audio Input Socket:** For connecting an external microphone. The built-in microphone is turned off whenever an external microphone is plugged-in.
- 6) **Audio Output Socket:** For use with a headphone or speakers.
- 7) **Alarm Output Socket**
- 8) **Alarm Input Pin**

3 Accessing the iBaby monitor over a Local Area

Network

3.1 Local Area Network connection

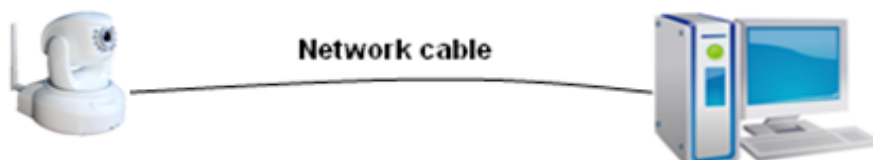


Figure 3

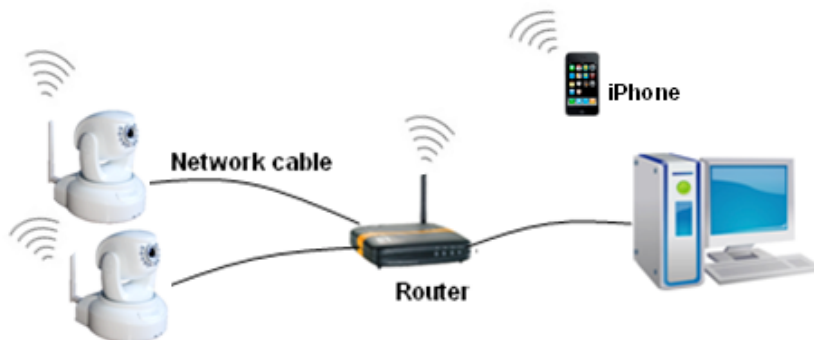



Figure 4

3.2 Accessing the iBaby monitor from an iPod Touch, iPhone or iPad

You first need to install the iBaby monitor App from the Apple App Store. (Find it by searching for "iBaby monitor BM.") THIS IS A FREE DOWNLOAD. (Before downloading, first confirm the iOS on your device is version 4.0 or later. If not, update your iOS.)

After the app has been installed, this icon should appear: .

Launch the iBaby monitor App. The App will search for the camera automatically. Select the "Set Up" button and follow instructions.

3.3 Configuring the iBaby monitor from a Windows PC: IP Address

Run "BSearch_en.exe" in the CD. You will see the setting interface shown in Figure 5.

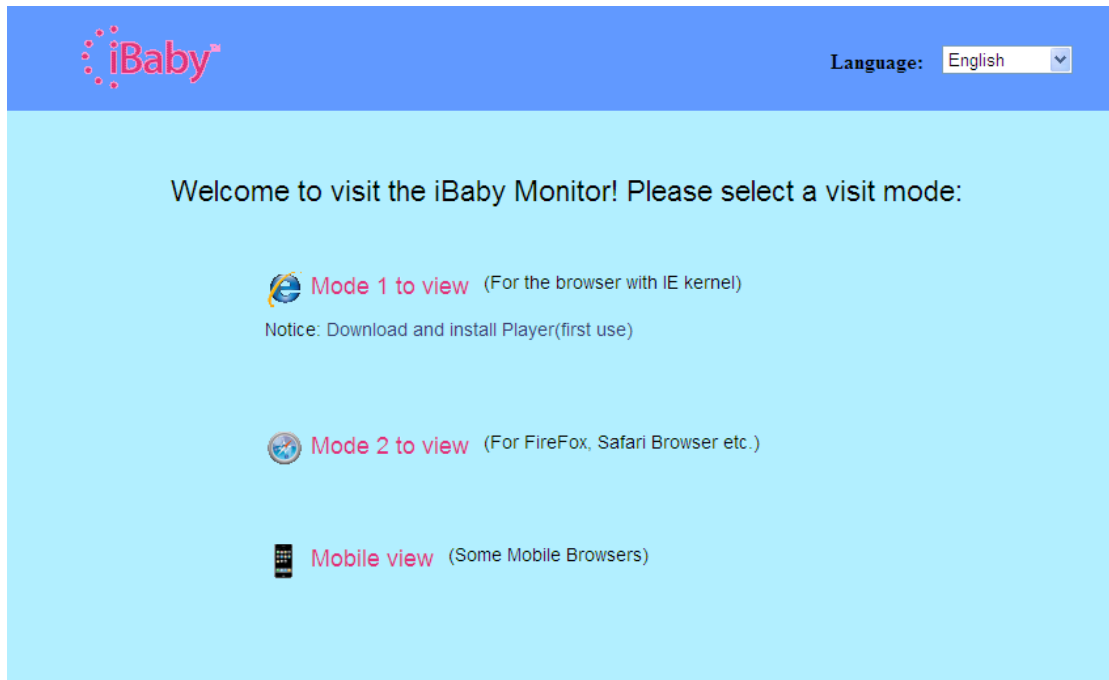


Figure 6

3.4 Accessing the iBaby monitor from a Windows PC

We suggest using Internet Explorer to view your iBaby monitor. First, you will need to install the player plug-in. To do so, click “Download and install player (first use)”. You'll then see a dialogue box, as shown in Figure 7. Click Run.



Figure 7

After installing the plug-in, click the “Mode 1 to view” link, shown in Figure 6, to view the video.

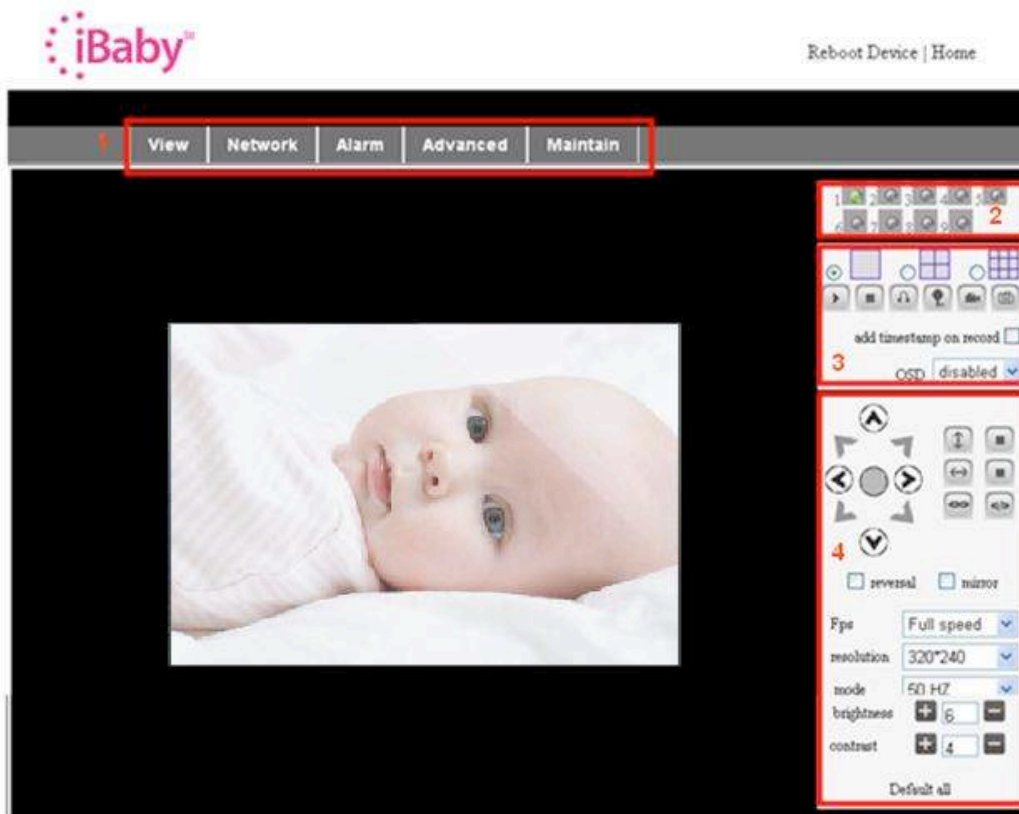


Figure 8

1) Main Menu

The main menu provides links to the different sub-menus of the iBaby monitor software.

2) Status Display Area

This is in the upper right-hand corner of the screen. It shows the status of the device.

- ◆ Gray: Not connected.
- ◆ Green: Connected.
- ◆ Yellow: Improperly configured.
- ◆ Red: Alarm.

3) Multi Channel displaying area

Several iBaby monitors can be connected as part of the same system. (See Section 5.3.2 of these instructions.) Video from additional devices will be shown here. Select the device you wish to control by clicking on it.



These buttons, in the order shown, indicate play, stop, audio, talk, record and take a snapshot.

Other Settings shown in Figure 9.

Other Settings	
Status LED Mode	Open Indicator LED <input type="button" value="v"/>
PTZ settings	
PTZ Center on Start	No <input type="button" value="v"/>
Horizon Patrol Rounds	1 <input type="button" value="v"/> (NOTE: 0 means infinity)
Vertical Patrol Rounds	1 <input type="button" value="v"/> (NOTE: 0 means infinity)
Manual PTZ Rate	0 <input type="button" value="v"/>
Auto Horizon Rate	5 <input type="button" value="v"/>
Auto Vertical Rate	5 <input type="button" value="v"/>
Path Set	
Record Path	C:\Documents and Settings\All Users\Documents <input type="button" value="Browse.."/>

Figure 9

4) Pan/Tilt and video control

Using the icons in the Pan/Tilt control area, user can move their iBaby monitor up, down, left and right. Other controls are available, such as middle, horizontal cruise, vertical cruise and stop.



These are used to Open IO output and Close IO output.

User can also set the device frame rate, resolution, brightness, contrast and other parameters.

4 Accessing the iBaby monitor over the Internet

4.1 Internet connection

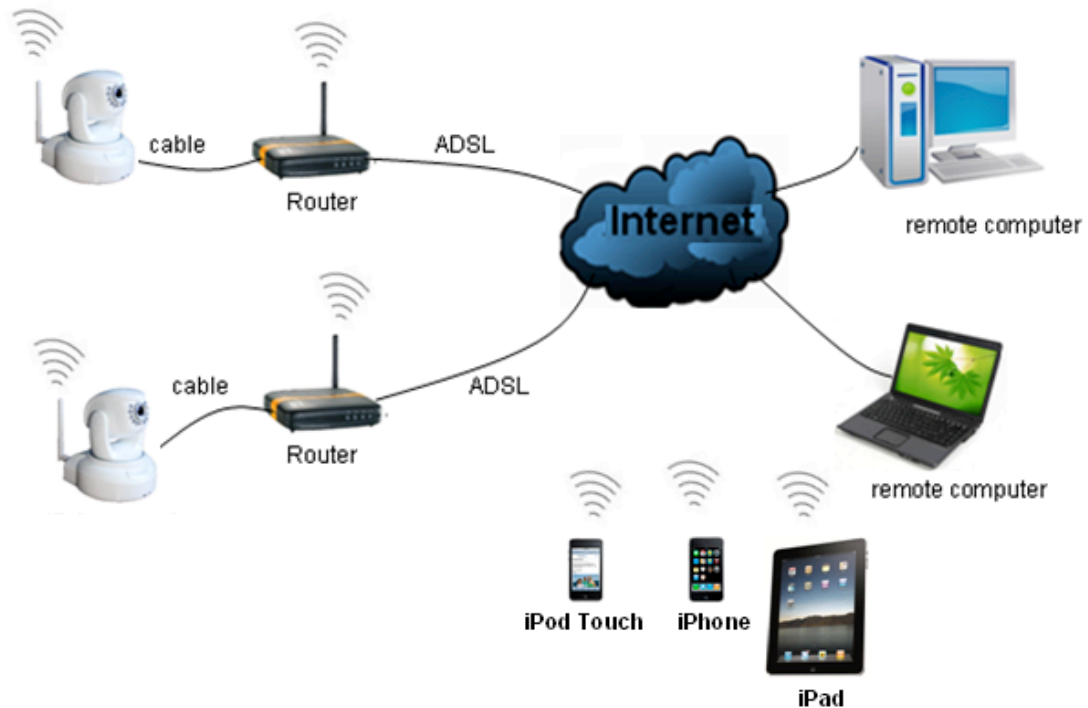


Figure 10

4.2 Port forwarding

Most current routers have UPnP, or Universal Plug and Play. The default within the iBaby monitor is for UPnP to be on, meaning that the software takes care of port forwarding automatically. To configure a port manually, you must first connect to it over your LAN.

Please consult your router's User Manual for port forwarding configuration information. Once port-forwarding is configured, your iBaby Monitor should be accessible over the Web.

4.3 DDNS

DDNS stands for Dynamic Domain Name Service. Think of it as a URL assigned to your specific iBaby monitor that allows you to view the monitor from any computer connected to the Web.

4.3.1 Manufacturer's DDNS

The device manufacturer has provided a free DDNS. You can find it in the Network menu, as shown in Figure 11, and on a sticker at the base of the unit.

Manufacturer's DDNS	
Manufacturer's Domain	107abcd.ibbdns.com

Figure 11

4.3.2 Third Party DDNS

You can also use a DDNS supplied by a third party. To do so, obtain the DDNS and fill it in as shown in Figure 12.

Third Party DDNS	
DDNS Service	3322.org
DDNS User	btest
DDNS Password	••••••••
DDNS Host	btest.3322.org

Figure 12

Note: If your third-party DDNS does not use Port 80, you need to specify the port when entering in the DDNS. Do this by appending a colon and then the port number following the entry for the DDNS. **The manufacturer DDNS is not needed to add PORT.**

5 Other Settings

5.1 Network Settings

5.1.1 Basic Network Settings

Figure 13 shows how to set up the Basic Network Settings to have an IP address assigned to your iBaby monitor automatically.

Network Settings	
Obtain IP automatically	<input checked="" type="checkbox"/>
Http Port	14971

Figure 13

5.1.2 Wi-Fi Setting

If your iBaby monitor is going to be set up over Wi-Fi, use the configuration menu shown in Figure 14. First, click the “Scan” button to see the available networks. Highlight the one you wish to use, then check “Using Wireless Lan.” Then fill in the SSID, encryption method and share key or password; you can get this information from your router. Click “Set” when finished.

Wireless Settings	
Wireless Network List	ChinaNet-Tbkr[00255e1e5d08] infra WPA/WPA2-PSK wifi[001e58f37857] infra WPA/WPA2-PSK netview[002586697046] infra WPA/WPA2-PSK <input type="button" value="Scan"/>
Using Wireless Lan	<input checked="" type="checkbox"/>
SSID	wifi
Encryption	WPA2 Personal (AES) ▾
Share Key	8939038200

Figure 14

Note 1: When the device is connected to both a Wi-Fi and wired network, it will first try to connect to the wired network. If that connection fails, it will switch to Wi-Fi. The IP address and port is the same in either case.

Note 2: The iBaby monitor needs to be connected by cable to your router before the wireless settings described above can be put in place. Once the Wi-Fi settings have been saved, you can remove the cable, and the wireless connection will begin operating.

5.1.3 ADSL Settings

Users with ADSL Dialup should configure their device as shown in Figure 15. The user name and password should be obtained directly from your ADSL service provider. Once the settings are saved, connect the iBaby monitor directly to the ADSL modem, and it will be connected to the Internet.

ADSL Settings	
Using ADSL Dialup	<input checked="" type="checkbox"/>
ADSL User	<input type="text" value="szlgview@163.gd"/>
ADSL Password	<input type="password" value="••••••"/>

Figure 15

5.1.4 UPnP Setting

If you enable UPnP by checking its box as shown in Figure 16, the iBaby monitor, upon power-up, will communicate with the router and handle port-forwarding automatically.

UPnP Settings	
Using UPnP to Map Port	<input checked="" type="checkbox"/>

Figure 16

Before using UPnP, please make sure your router's UPnP function has been enabled. Note that since not all UPnP implementations are the same, and you may discover that your router doesn't properly support the iBaby monitor. Should this occur, disable UPnP and assign port-forwarding manually.

5.1.5 DDNS Settings

Please refer Section 4.3.

5.1.6 MSN Settings

MSN Config	
User	test1@hotmail.com
Password	●●●●●●●●
MSN Friends List	friend1@hotmail.com

Figure 17

iBaby monitor users with an MSN email account can fill in this section if they wish. Fill in User and Password with respective settings from MSN. Then, fill in any email address to receive iBaby monitor alerts.

5.2 Alarm Settings

5.2.1 Alarm Settings

1) Motion Detection

The alert on your iBaby monitor can be triggered if motion is detected. The sensitivity of the motion detector needs to be set, using a number between 1 and 10, with 10 being the most sensitive.

Users have the option of connecting an external alert to their device with the Alarm Output Socket shown in Figure 2. Once this external alert is connected, users should check the "Alarm Input Armed" box. If the external alert detector is "always on" switch alarm, use the "open" option. If the external alert detector is "always off," choose "close".

The iBaby monitor alert can also be triggered when sounds are detected. Set the sensitivity of the device; the higher the number, the more sensitive to noise it will be.

Alarm Settings	
Alarm Detect	
Motion Detect Armed	<input checked="" type="checkbox"/> Motion Detect Sensibility 5 ▾
Alarm Input Armed	<input checked="" type="checkbox"/> <input checked="" type="radio"/> Open <input type="radio"/> Close
Sound Alarm Detection	<input checked="" type="checkbox"/> Sound sensitivity 5 ▾
Alarm Action	
IO Linkage on Alarm	<input type="checkbox"/>
Send Mail on Alarm	<input checked="" type="checkbox"/>
Upload Image to FTP	<input type="checkbox"/>
Enable Alarm Server	<input type="checkbox"/>
Scheduler	
<input checked="" type="radio"/> All time <input type="radio"/> Schedule(NOTICE:set the correct 'Device Clock')Device Clock	

Figure 18

2) Alarm Actions

Several things can happen when an alert is triggered, depending on whether the box for that action is checked, as shown in Figure 18.

- IO Linkage on Alarm: This triggers whatever external alarm might be plugged into the iBaby Monitor.
- Send Mail on Alarm. Send an email notification to the supplied email address.
- Upload Image to FTP. This sends still pictures from the camera via FTP. Users can control the interval at which pictures are sent.
- Enable Alarm Server.

3) Scheduler

Your iBaby monitor can also be set to automatically trigger an alert action at a scheduled time, including "All the time". Figure 19 shows how to set up this feature.

eMail Settings	
Sender	sender@sohu.com
Receiver 1	receiver@sohu.com
Receiver 2	
Receiver 3	
Receiver 4	
SMTP Server	smtp.sohu.com
SMTP Port	25
Transport Layer Security Protocol	None <input type="button" value="v"/>
Gmail only support TLS at 465 port and STARTTLS at 25/587 port.	
Need Authentication	<input checked="" type="checkbox"/>
SMTP User	sender
SMTP Password	••••••
<input type="button" value="Test"/> Please set at first, and then test.	
Report Internet IP by Mail	<input type="checkbox"/>

Figure 20

5.2.3 FTP Service Settings

Ftp Settings	
FTP Server	192.168.0.56
FTP Port	21
FTP User	test
FTP Password	•••••
FTP Upload Folder	/test
FTP Mode	PORT <input type="button" value="v"/>
<input type="button" value="Test"/> Please set at first, and then test.	
Upload Image Periodically	<input type="checkbox"/>

Figure 21

When the alarm is triggered, the iBaby monitor can be configured to snap a picture and send the image to FTP server. Set up the server information as shown in Figure 21. Click “Test” to see if the system is configured properly.

The “Upload Image Periodically” setting, if checked, will send an image to the FTP server periodically, even when no alert has been triggered.

In order to use the FTP function, users need to supply the username and password associated with the FTP site. They should also provide the path name required for any files that need be stored, and be sure that proper permissions have been set on the server.

5.2.4 Alarm Server

Alarm server	
Server Address:	192.168.0.78
Server Port:	1000
User Name:	test
Password:	•••••

Figure 22

This section is intended for users who wish to extend alarm notifications to other devices, such as mobile phones via SMS messaging. The alarm message format is as follows:

```
GET /api/alarm.asp?
  username=username&
  userpwd=password&
  rea=alarm type (1=Motion Detection, 2 =Alarm from Alarm in port)&
  io=0
```

5.3 Advanced

5.3.1 User Settings

Three user settings are possible. An "Administrator" can change any settings. An "Operator" can operate the camera but can't change any settings. A "Visitor" can watch the video, but is unable to either change settings or control the camera. **By default, the administrator's user name is "admin", password: "123456".**

Users Settings		
User	Password	Group
admin	••••••	Administrator ▼
user	••••	Operator ▼
guest	•••••	Visitor ▼

Figure 23

5.3.2 Multi Device Settings

Multi-Device Settings	
Device List in Lan	anonymous(192.168.0.247) 002alcl(192.168.0.67) 002abyc(192.168.0.239) 002aqvc(192.168.0.241)
	<input type="button" value="Refresh"/>
The 1st Device	This Device
The 2nd Device	None
The 3rd Device	None
The 4th Device	None
The 5th Device	None
The 6th Device	None
The 7th Device	None
The 8th Device	None
The 9th Device	None
attention: If you want to access the device from internet, be sure the host and port that you set can be accessed from internet.	
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 24

As indicated in Figure 24, users can add an unlimited amount of iOS devices connected to the iBaby monitor and viewed simultaneously. When a new device is added, click the "Refresh" button, and then highlight the new device. Use the menu that pops up to enter information for the new camera, as shown in Figure 25. Finally, click "Save."

The 2nd Device	None
Alias	<input type="text" value="002alcl"/>
Host	<input type="text" value="192.168.0.67"/>
Http Port	<input type="text" value="80"/>
User	<input type="text" value="admin"/>
Password	<input type="password" value="••••••"/>
<input type="button" value="Save"/> <input type="button" value="Remove"/>	

Figure 25

5.3.3 Other settings

Figure 26 shows several other advanced settings.

* You can choose to turn on or off the indicator LED.

* With PTZ (or Pan/Tilt/Zoom) settings, selecting "Yes" for "PTZ Center on Start" will cause the camera, upon startup, to move to the center and then stop.

- * You can also set the Horizontal and Vertical patrol keys.
- * In the setting for the Manual PTZ Rate; the lower the number, the quicker the speed.

Other Settings	
Status LED Mode	Open Indicator LED <input type="button" value="v"/>
PTZ settings	
PTZ Center on Start	No <input type="button" value="v"/>
Horizon Patrol Rounds	1 <input type="button" value="v"/> (NOTE: 0 means infinity)
Vertical Patrol Rounds	1 <input type="button" value="v"/> (NOTE: 0 means infinity)
Manual PTZ Rate	5 <input type="button" value="v"/>
Auto Horizon Rate	5 <input type="button" value="v"/>
Auto Vertical Rate	5 <input type="button" value="v"/>
Path Set	
Record Path	C:\Documents and Settings\All Users\Documents <input type="button" value="Browse.."/>

Figure 26

5.4 Maintenance

5.4.1 Device Information

Device Info	
Device ID	107aaaa
Device Firmware Version	21.37.2.41
Device Embedded Web UI Version	0.28.4.19
MAC	00:00:E3:02:0F:01
Alarm Status	None
Third Party DDNS Status	No Action
UPnP Status	No Action
MSN Status	No Action

Figure 27

5.4.2 Time Setting

If the device is connected to the Internet, you can take advantage of the Web's NTP server to select the proper time zone and keep the correct time. Or, you can synch the time from your PC.

Date & Time Settings	
Device Clock Time	2010 - 3 - 29 20:08:20
Device Clock Timezone	(GMT -08:00) Pacific Standard(USA and Canada) ▼
Sync with NTP Server	<input checked="" type="checkbox"/>
Ntp Server	time.nist.gov ▼
Sync with PC Time	<input type="checkbox"/>

Figure 28

5.4.3 Firmware upgrades

The device runs two kinds of programs: One in system firmware, the other in application firmware. They can each be upgraded separately.

Upgrade Firmware	
Upgrade Device Firmware	<input type="text"/> <input type="button" value="Browser..."/> <input type="button" value="Submit"/>
Upgrade Device Embedded Web UI	<input type="text"/> <input type="button" value="Browser..."/> <input type="button" value="Submit"/>

Figure 29

5.4.4 Restore Factory Defaults

Click “Restore Factory Default.” A confirmation dialogue will appear, allowing the user to restore all factory defaults. The unit then reboots.

5.4.5 User Browsing Log

As shown in Figure 30, this shows you who has viewed video from your iBaby monitor, and the time the viewing occurred.

Log				
Mon, 2010-03-29 19:05:20	admin	192.168.0.175	access	
Mon, 2010-03-29 19:43:33	user	192.168.0.175	access	
Mon, 2010-03-29 19:47:51	user	192.168.0.175	access	
Mon, 2010-03-29 19:49:02	guest	192.168.0.175	access	
Mon, 2010-03-29 19:57:40	admin	192.168.0.175	access	

Figure 30

6 Centralization Control

This allows you to browse several devices on a LAN or over the Web at the same time. Other features are also supported; see Figure 31.

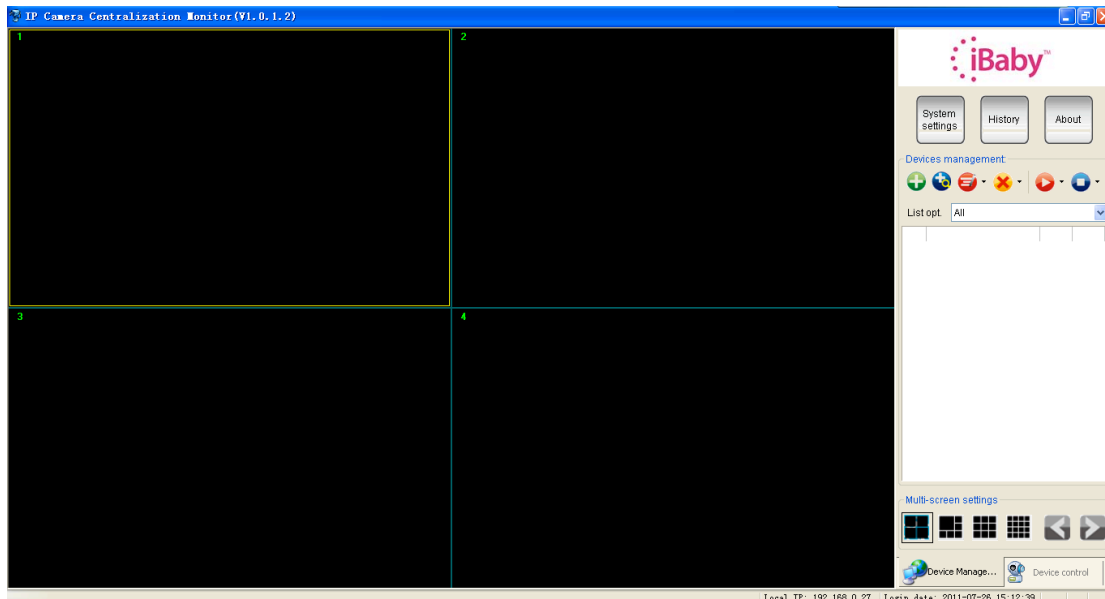


Figure 31

7 FAQ

- 1) **Can I use any adaptor with my iBaby monitor?** No, an unmatched power adapter can severely damage the equipment.
- 2) **Why is my browser slow when I look at video from my camera?** That may occur if your Web connection isn't fast enough to support the MJPEG video compression used by the iBaby monitor. The typical bandwidth uses situation as below:
 - 640x480@10fps : 4.0 Megabits ~ 5.0 Megabits
 - 320x240@30fps : 1.2 Megabits ~ 1.6 Megabits
- 3) **I can't find my iBaby monitor after I have connected it to a LAN**
 Make sure the monitor and your PC are on the same LAN. Make sure your firewall is not blocking signals from the device.
- 4) **I can see my camera listed, but I can't access it.** Make sure both the camera and the PC have the same Network Segment in their IP address. (This is the first three numbers of the address.) If the IP address of your PC, for example, is 192.168.0.100, it can only access equipment with IP addresses between 192.168.0.1 and 192.168.0.255.
- 5) **I can access the monitor via its public IP address, but I can't visit it via the manufacturer's domain name**
 Make sure the DNS settings are the same as on your PC.

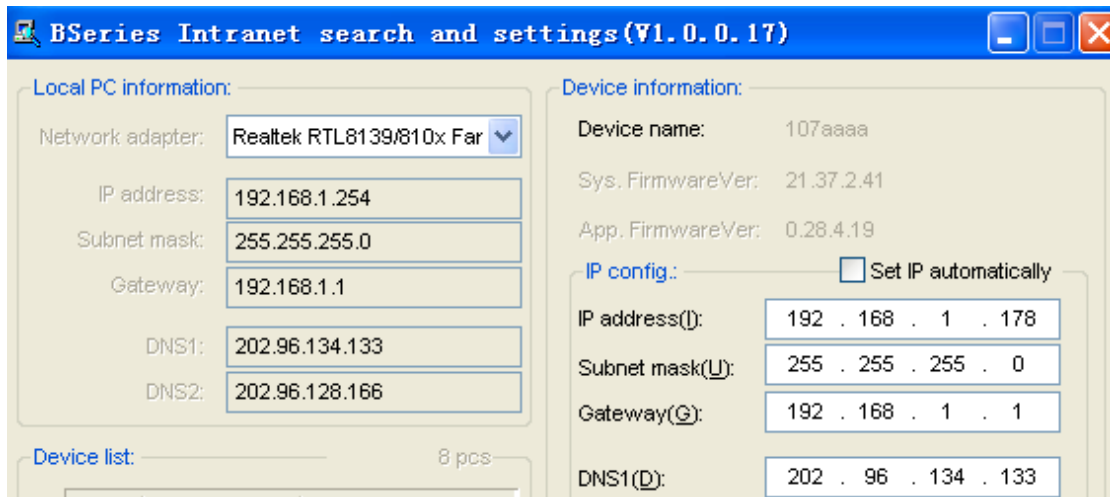


Figure 32