Model 25931 Series 5.8 GHz Cordless Handset Speakerphone System User's Guide



Your new GE telephone system is EXPANDABLE up to a total of 4 handsets (by purchase of optional Model 25901 handset with charge cradle)

Equipment Approval Information

and is in compliance with parts 15 and 68. FCC Rules and Regulations and the Technical Requirements for Telephone Terminal Equipment published by ACTA.

1 Notification to the Local Telephone Company

On the bottom of this equipment is a label indicating, among other information, the US number and Ringer Equivalence Number (REN) for the equipment. You must, upon request, provide this information to your telephone company

The REN is useful in determining the number of devices you may connect to your telephone line and still have all of these devices ring when your telephone number is called. In most (but not all) areas, the sum of the RENs of all devices connected to one line should not exceed 5. To be certain of the number of devices you may connect to your line as determined by the REN, you should contact your local telephone compan

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for

• This equipment may not be used on coin service provided by the telephone company.

- Party lines are subject to state tariffs, and therefore, you may not be able to use your own telephone equipment if you are on a party line. Check with your local telephone company.
- Notice must be given to the telephone company upon permanent disconnection of your telephone from your line.
- If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this product does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified

US Number is located on the cabinet bottom. REN Number is located on the cabinet bottom.

00006681 (Rev 0 Dom F) Printed in China

THOMSON 🗯

ATLINKS USA, Inc 10330 North Meridian Street Indianapolis IN 4629 © 2006 ATLINKS USA. Inc rademark(s) ® Registered Marca(s) Registrada(s

Rights of the Telephone Company

Should your equipment cause trouble on vour line which may harm the telephone network. the telephone company shall, where practicable, notify you that temporary discontinuance of service may be required. Where prior notice is not practicable and the circumstances warrant such action, the telephone company may temporarily discontinue service immediately. In case of such temporary discontinuance, the telephone company must: (1) promptly notify you of such temporary discontinuance; (2) afford you the opportunity to correct the situation; and (3) inform you of your right to bring a complaint to the Commission pursuant to procedures set forth in Subpart E of Part 68, FCC Rules and Regulations.

The telephone company may make changes in its communications facilities equipment operations or procedures where such action is required in the operation of its business and not inconsistent with FCC Rules and Regulations. If these changes are expected to affect the use or performance of your telephone equipment, the telephone company must give you adequate notice, in writing, to allow you to maintain uninterrupted service.

Interference Information

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference; and (2) This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device,

pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular If this equipment does cause harmful interference to radio or television reception, which can be

determined by turning the equipment off and on the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is

- Reorient or relocate and increase the separation between the telecommunications equipment and receiving antenna
- Connect the telecommunications equipment into an outlet on a circuit different from that to which the receiving antenna is connected.

If these measures do not eliminate the interference, please consult your dealer or an experienced radio/television technician for additional suggestions. Also, the Federal Communications Commission has prepared a helpful booklet, "How To Identify and Resolve Radio/TV Interference Problems." This booklet is available from the U.S. Government Printing Office, Washington, D.C. 20402. Please specify stock number 004-000-00345-4 when ordering copies.

Hearina Aid Compatibility (HAC)

This telephone system meets FCC standards for Hearing Aid Compatibility

icensina

Licensed under US Patent 6.427.009

"receiving" the interference).

FCC RF Radiation Exposure Statement

his equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter

or body worn operation, this phone has been tested and meets the FCC RF exposure quidelines when used with the belt clip supplied with this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

WARNING: TO PREVENT FIRE OF ELECTRICAL SHOCK HAZARD, DO NOT **EXPOSETHIS** PRODUCT TO RAI

Introduction



CAUTION: When using telephone equipment, there are basic safety instructions that should always be followed. Refer to the IMPORTANT SAFETY INSTRUCTIONS provided with this product and save them for future reference.

IMPORTANT: Because cordless phones operate on electricity, you should have at least one phone in your home that isn't cordless, in case the power in your home goes out.

Before You Begin



For Model 25931xx2 there will be ONE additional handset, charge cradle, belt clip, battery pack and cover than shown above.

For Model 25931xx3 there will be TWO additional handsets, charge cradles, belt clips battery packs and covers than shown above.

Telephone Jack Requirements To use this phone, you need an RJ11C type modular telephone

jack, which might look like the one pictured here, installed in your home. If you don't have a modular jack, call your local phone company to find out how to get one installed.

Wall plate Modular line iack

Digital Security System

Installation

Your cordless phone uses a digital security system to protect against false ringing, unauthorized access, and charges to your phone line.


INSTALLATION NOTE: Some cordless telephones operate at frequencies that may cause or receive interference with nearby TVs, microwave ovens, and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near or on top of a TV, microwave ovens, or VCR. If such interference continues, move the cordless telephone farther away from these appliances.


Certain other communications devices may also use the 5.8 GHz frequency for communication, and, if not properly set, these devices may interfere with each other and/or your new telephone. If you are concerned with interference, please refer to the owner's manual for these devices on how to properly set channels to avoid interference. Typical devices that may use the 5.8 GHz frequency for communication include wireless audio/video senders, wireless computer networks, multi-handset cordless telephone systems, and some long-range cordless telephone systems.

Important Installation Guidelines

- Avoid sources of noise and heat, such as motors, fluorescent lighting, microwave ovens, heating appliances and direct sunlight.
- Avoid areas of excessive dust, moisture and low temperature.
- Avoid other cordless telephones or personal computers. Never install telephone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch non-insulated telephone wires or terminals, unless the telephone line has been disconnected at the network interface.
- Use caution when installing or modifying telephone lines.

Handset Lavout

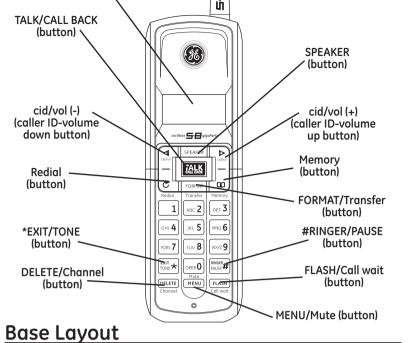



Installing the Phone

Installing the Handset Battery


NOTE: You must connect the handset battery before use.

CAUTION: To reduce the risk of fire or personal injury, use only the ATLINKS USA, Inc. Nickel-Cadmium battery model 5-2548, which is compatible with this unit.

1. Locate battery and battery door which are packaged together inside a plastic bag and are separate from the handset.


- 2. Locate the battery compartment on the back of the handset.
- 3. Plug the battery pack cord into the jack inside the compartment. PLEASE REGISTER shows in the display.

NOTE: To ensure proper battery installation, the connector is keyed and can be inserted only one way.



- 4. Insert the battery pack.
- 5. Close the battery compartment by pushing the door up until it snaps into place.
- 6. Place the handset in the base. The unit will take 20 seconds to register and verify its security code. READY shows in the handset's display.
- NOTE: After a power outage or battery replacement, you should place the handset in the main base for about 20 seconds to reset the code.

. Choose an area near an electrical outlet and a telephone wall jack (RJ11C), and place your cordless telephone on a level surface, such as a desktop or tabletop, or vou may mount it on the wall.



- 2. Plug one end of the telephone line cord into the TEL LINE jack on the bottom of the base and the other end into a modular jack. 3. Program the RINGER (on the handset) to ON, this can be done through the handset
- setup menu Ringer Volume or its shortcut 4. Plug the AC power converter into the electrical outlet and the DC connector into the
- 6. Place the handset in the base cradle. The charge/in use indicator turns on, verifying
- the phone, battery performance is compromised. CAUTION: Use only the ATLINKS USA, Inc. 5-2501 power adapter that came with this unit. Using other power adapters may

7. Allow the phone to charge for 16 hours prior to first use. If you don't properly charge

Wall Mounting Turn the base over

jack on the bottom of the base.

damage the unit.

- 2. Attach the wall mounting pedestal by first inserting the tabs on the open edge of
- the pedestal into the slots on the lower portion of the bottom of the base. Then push down and snap the pedestal into place. 3. Slip the mounting holes (on the back of the base) over the wall plate posts, and slide
- the unit down into place. (Wall plate not included.)

NOTE: If desired, gather the extra telephone line and power adaptor cord and store inside the wall mounting pedestal.

here are eight programmable menus available: Language, Handset Name, Area Code

Ringer Volume, Ringer Tone, Tone/Pulse, Transfer and Default Setting. 3) Press MENU/Mute again to save During programming, you may press the MENU/Mute button at any time to go to the next option. To exit the menu, keep the previous setting and return to the standby

Display Language

mode, press the *EXIT/TONE button.

- . Press the MENU/Mute button until >1ENG 2FRA 3ESP shows in the display. 1ENG is
- 2. Use the cid/vol (or +) button or the touch-tone pad on the handset to enter vour selection
- 3. Press MENU/Mute again to save.

Handset Name

- 1. Press the MENU/Mute button until ENTER NAME shows in the display. READY is the default.
- 2. Use the touch-tone pad on the handset to enter the name (up to 15 characters) and press the memory button to save. More than one letter is stored in each of the number keys. For example, to enter the name Bill Smith, press the 2 key twice for the letter B. Press the 4 key 3 times for the letter I. Press the 5 key 3 times for the letter L. Wait for one second. Press the 5 key 3 times for the second letter L. Press the 1 key to insert a space between the L and the S. Press the 7 key 4 times for the letter S; press the 6 key once for the letter M; press the 4 key 3 times for the letter I; press the 8 key for the letter T; press the 4 key twice for the letter H
- NOTE: If you make a mistake press the DELETE/Channel button to backspace and erase the wrong character(s) or number(s).
- Press MENU/Mute again to save.

Local Area Code

- 1. Press the MENU/Mute button until AREA CODE - shows in the display. - is the default
- 2. Use the touch-tone pad on the handset to enter your three digit area code.
- 3. Press MENU/Mute again to save.
- NOTE: If you make a mistake, press the DELETE/Channel button to erase a wrong number.

Ringer Volume

- 1. Press the MENU/Mute button until RINGER ▶ 1 HIGH shows in the display. 1 HIGH is the default.
- 2. Use the cid/vol (or +) button or the touch-tone pad on the handset to scroll to 1 HIGH, 2 LOW, or 3 OFF.
- 3. Press MENU/Mute to save

NOTE: If you turn the ringer OFF, RINGER OFF shows on the display.

Ringer Tone

You can choose from either ringtones (1-3) or melodies (4-13).

- 1. Press the MENU/Mute button until RINGER TONE ▶ 01 shows in the display. 1 is the default
- 2. Use the cid/vol (or +) button on the handset to select from 1 to 13.
- 3. Press MENU/Mute to save.

Tone/Pulse

Most telephone systems use tone dialing, however, some may still use pulse dialing. If you aren't sure which dialing system you have, set the telephone to tone dialing and make a test call. If the call connects, the setting is correct. If the call does not connect, set the telephone to pulse dialing.

- 1. Press the MENU/Mute button until RINGER > 1 TONE 2 PULSE shows in the display. 1 TONE is the default.
- 2. Use the cid/vol(-or +) button or the touch-tone pad on the handset to scroll to 1 TONE or 2 PULSE.
- 3. Press MENU/Mute to save

Transfer ON/OFF

In order to use the Call Transfer feature (applicable ONLY with additional handsets), you must have the Transfer ON/OFF set to ON through the menu of each handset.

- 1). Press the MENU/Mute button until TRANSFER > 10FF shows in the display. 10FF is
- 2) Use the cid/vol (- or +) button or the touch tone pad on the handset and select 20N

Default Setting

- 1. Press the MENU/Mute button until DEFAULT ▶ NO shows in the display. NO is
- 2. Use the cid/vol(-or +) button on the handset to scroll to YES or NO.
- 3. Press MENU/Mute to save. You will hear a confirmation tone.

Cordless Phone Basics Charge/In Use Indicator

The phone is **ON** when the TALK/CALL BACK indicator on the handset and the charge/in use indicator on the base is lit. The handset and base indicators flash when you receive a call.

Answering a Call

- 1. When the phone rings, pick up the handset and press the TALK/CALL BACK or SPEAKER button 2. When finished, press the TALK/CALL BACK or SPEAKER button again or place the
- handset on the base cradle to hang up.

Making a Call 1. Pick up the handset and press the TALK/CALL BACK or SPEAKER button. Wait for the

- dial tone. The call timer starts counting minutes and seconds in the display. 2. Dial a telephone number.

3. When finished, press the TALK/CALL BACK or SPEAKER button again or place the handset on the base cradle to hang up.

seconds to reset the unit.

enter the correct number

1. Make sure the phone is **OFF** (not in TALK mode).

2. Dial a telephone number (the number you dial shows in the display).

NOTE: You may enter up to 32 pre-dial digits.

TALK/CALL BACK or SPEAKER button to redial the last number.

which are available through your local phone company.

the DELETE/Channel button to move to the next clear channel.

Press the *EXIT/TONE button to cancel any command you initiated

This feature assists in locating a misplaced handset.

Ringer high/low/off Shortcut

lowest volume and VOL 4 is the highest volume.

2. Press the MENU/Mute button when finished.

the phone is **OFF** (not in talk mode).

1HIGH, 2LOW or 3OFF.

tone.

Volume

will not hear you.

Channel Button

redial the last number you dialed (up to 32 digits).

NOTE: If you make a mistake dialing the number, use the DELETE/

3. Press the TALK/CALL BACK or SPEAKER button on that handset. The number auto-

4. When finished, press the TALK/CALL BACK or SPEAKER button again to hang up

While the phone is **ON** (in TALK or SPEAKERPHONE mode), press the Redial button to

Use the FLASH/Call wait button to activate custom calling services such as call waiting.

While the phone is **OFF** (in standby mode), press the Redial button and then the

TIP: Do not use the TALK/CALL BACK button to activate custom

calling services such as call waiting or you'll hang up the phone.

While talking on the phone, it may be necessary for you to manually change the

Press the page button on the base. The handset beeps continuously for about 2

NOTE: You may still page the handset when the ringer is off.

1. Press the #RINGER/PAUSE button to go to the RINGER VOLUME menu.

2. Use the cid/vol (- or +) button or the touch-tone pad on the handset to scroll to

3. Press the #RINGER/PAUSE button to save your selection. You will hear a confirmation

When the phone is **ON** (in TALK or SPEAKERPHONE mode) press the cid/vol (- or +)

button to adjust the listening level. Choose from four volume settings. VOL 1 is the

RINGER > 1HIGH shows in the display. 1HIGH is the default.

minutes until you press the TALK/CALL BACK button on the handset or the page button

Apart from the setting in the main menu, there is a shortcut to set the ringer. Make sure

channel to improve reception and reduce noise or static on the line. Press and release

matically dials and the call timer starts counting the minutes and seconds in the

Channel button to backspace and erase the wrong number, and

Pre-dialina

NOTE: In case of power failure, the handset may display UNAVAILABLE when the TALK/CALL BACK or SPEAKER button is pressed. You must then place the handset on the main base for 20

Temporary Tone

enables pulse (rotary service phone users to access touch tone services offered by banks, credit card companies, etc. For example, when you call your bank you may need to enter your bank account number. Temporarily switching to touch tone mode allows vou to send vour number.

- 1. Dial the telephone number and wait for the line to connect.
- 2. When your call is answered, press the *EXIT/TONE button on the handset to temporarily change from pulse dialing to tone dialing.
- dialing mode.

handsets)


NOTE: The transfer feature MUST be set to ON. this can be done through each handset's setup menu function, Transfer ON/OFF.

- 1. Press the FORMAT/transfer button on the originating handset. TRANSFERRING shows in the display. All registered handsets will be paged.
- answer call.

NOTE: If there is no answer within 2 minutes after transferring the call, then the handsets will be rung back (callback). If no handset answers within 30 seconds, then the external call will be automatically dropped.

IMPORTANT: In order to use this unit's Caller ID features, you must subscribe to either the standard Name/Number Caller ID Service or Call Waiting Caller ID Service. To know who is calling while you are on the phone, you must subscribe to Call Waiting Caller ID Service.

This information can include the phone number, date, and time; or the name, phone



Call Waiting Caller ID

Provided you subscribe to Call Waiting Caller ID service from your phone company, you are able to see who is calling while you are on the phone when you hear the call waiting beep. The caller identification information appears in the display after you hear

Call wait button to put the current call on hold and answer the incoming call.

When you receive a call, the Caller ID information is transmitted between the first and second ring. The Caller ID information appears on the display while the phone rings, giving you a chance to monitor the information and decide whether or not to answer

Switching between the Speakerphone and Handset

- 1. If you are using the handset earpiece and want to switch to the speakerphone, press the SPEAKER button, you can then press SPEAKER button again to end conversation.
- 2. If you are using the speakerphone and want to switch to the handset earpiece, press the TALK/CALL BACK button, you can then press the TALK/CALL BACK button again to end conversation.

The feature is useful only if you have pulse (rotary) service. Temporary Tone Dialing

- 3. Follow the automated instructions to get the information you need.
- 4. Hang up the handset and the phone automatically returns to pulse (rotary)
- Call Transfer (applicable only with additional

During an external call, you may transfer the external call to another handset.

- 2. Press the FORMAT/transfer button or TALK/CALL BACK on receiving handset to
- NOTE: To cancel the call transfer, you may press *EXIT/TONE button or the FORMAT/trans button on the originating handset.

Caller ID (CID)

This unit receives and displays information transmitted by your local phone company. number, date, and time.



the tone • When you hear the call waiting beep in the handset receiver, press the FLASH/

Use mute during a phone conversation to speak privately and off-line with a third party. Receiving CID Records 1. Press the MENU/Mute button. MUTE shows in the display. The party on the telephone

Storing CID Records (In CID Memory)

If you are not at home or cannot answer, your telephone's Caller ID memory stores the data for the 40 most recent calls you received so you can see who called while you were unavailable. When the 41st call is received the oldest Caller ID record (1st call) is Deleting All CID Records

You may review the stored information at any time. Calls received since your last review show as **NEW** in the display. Calls that have not been previously reviewed but were received from the same number more than once show as **REPT** in the display.

Reviewing CID Records

automatically deleted.

As calls are received and stored, the display is updated to let you know how many calls have been received. To scroll CID records:

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Press the cid/vol (-) button to review the newest CID record.
- 3. Press the cid/vol (+) button to review the oldest CID record first.

Dialina a CID Number

- 1. Make sure the phone is OFF (not in TALK mode).
- 2. Use the cid/vol (- or +) button to display the desired record.
- 3. Press the TALK/CALL BACK or SPEAKER button. The number dials automatically

NOTE: Depending on (a) how the incoming caller's phone number is formatted when it is received, and (b) whether or not you previously pre-programmed your local grea code into the set up menu, you may need to adjust the format of the incoming caller's stored phone number before making the call, press the FORMAT/Transfer button to adjust the number, and try again

Evalonation

Evampla

Available formats include: Number of digita

Number of aights	Ехріапаціоп	Ехаттріе	
Eleven digits	long distance code "1 " +3-digit area code +7-digit telephone number.	1-317-888-8888	
Ten digits	3-digit area code + 7-digit telephone number.	317-888-8888	
Seven digits	7-digit telephone number.	888-8888	

Storing CID Records in Internal Memory

You may also store CID information in the phone's internal memory.

NOTE: It is important that you format CID records correctly BEFORE storing in internal memory as you cannot reformat CID records stored in memory.

- 1. Make sure the phone is **OFF** (not in talk mode).
- 2. Use the cid/vol (- or +) button to scroll to the desired CID record.
- 3. Press the MEMORY button.
- 4. Use the touch-tone pad to enter a memory location (0-9) to store the number in that memory location. You will hear a confirmation tone. NOTE: If the memory location is occupied, REPLACE MEMO? is

displayed, and you must confirm replacement by pressing the MEMORY button. NOTE: Press the *EXIT button once to keep the previous setting

(making no changes) and return to the menu.

NOTE: If the selected CID record contains any information that is nonnumeric, the unit will not allow this record to transfer to the internal user memory. The handset will display UNABLE TO STORE.

To Replace a Stored CID Record

- 1. Repeat steps 1 through 3 in Storing CID Records in Internal Memory. After you enter the memory location, REPLACE MEMO? shows in the display.
- 2. Press the Memory button again, and the new CID record replaces the old memory in that location. You will hear a confirmation tone.

Deleting a CID Record

- 1. Make sure the phone is OFF (ot in TALK mode).
- 2. Use the cid/vol(-or +) button to display the CID record you want to delete.
- 3. Press DELETE/Channel. The display shows DELETE CALL ID?

4. Press DELETE/Channel again to erase the record and the next Caller ID record shows Reviewing and Deleting Stored Numbers

Make sure the phone is OFF (not in TALK mode).

which stores up to 40 CID records in each handset

1. Make sure the phone is **OFF** (not in TALK mode).

The display shows NO CALLS.

Press the Memory button.

the desired memory location.

Memory

24 digits).

sequence.

2. Press the Redial button.

2. Press the Redial button.

Stored Number

will hear a confirmation tone.

2. Use the cid/vol (- or +) button to display any Caller ID record.

3. Press and hold the DELETE/Channel button until DELETE ALL? shows in the display

4. Press DELETE/Channel again to erase all records. You will hear a confirmation tone

Each handset can store up to ten 24-digit numbers with up to 15-character names in

memory for quick dialing. This memory feature is in addition to the CID memory log.

3. Press the desired memory location (0 through 9) or use cid/vol(+or-) to scroll to

display. If the memory location is empty, EMPTY shows in the display.

and press the memory button to save. More than one letter is stored in each of the

letter B. Press the 4 key 3 times for the letter I. Press the 5 key 3 times for the letter L

Wait for one second. Press the 5 key 3 times for the second letter L. Press the 1 key

press the 6 key once for the letter M: press the 4 key 3 times for the letter I: press the

to insert a space between the L and the S. Press the 7 key 4 times for the letter S;

NOTE: If you make a mistake press the DELETE/Channel button to

6. Press the Memory button to save the name. The display shows ENTER TEL NUMBR.

7. Use the touch-tone pad to enter the telephone number you want to store (up to

NOTE: The system treats PAUSES as delays or spaces in the dialing

Press the Memory button to store the number. You will hear a confirmation tone.

4. Press the Memory button again to replace the old number with the new number. You

If a pause is needed to wait for a dial or access tone, press the #PAUSE/RINGER button

to insert a delay in dialing sequence of a stored number (for example, after you dial 9)

for an outside line, or to wait for a computer access tone.) pause shows in the display

3. Press the Memory button to store the number. You will hear a confirmation tone.

Inserting a Pause in the Dialing Sequence of a

backspace and erase the wrong character(s) or number(s).

8. Press Memory again to store the number. You will hear a confirmation tone.

1. Repeat steps 1 through 6 in Storing a Name and Number in Memory.

1. Repeat steps 1 through 6 in Storing a Name and Number in Memory.

Press the Memory button, and REPLACE MEMO? shows in the display.

as a P, and each pause counts as one digit in the dialing sequence.

Repeat steps 1 through 7 in Storing a Name and Number in Memory.

Press the Memory button, and REPLACE MEMO? shows in the display.

Changing a Stored Number

number keys. For example, to enter the name Bill Smith, press the 2 key twice for the

NOTE: If the memory location is occupied, the memory location

5. Use the touch-tone pad on the handset to enter the name (up to 15 characters)

number and stored name and telephone number shows in the

4. Press the Memory button again. The display shows ENTER NAME.

NOTE: If you don't want to enter the name, skip step 5.

8 key for the letter T; press the 4 key twice for the letter H.

Storing the Last Number Dialed

To replace an old number with a new redial number:

NOTE: Press the *EXIT key to return to the standby mode.

Storing a Name and Number in Memory

in the display. You will hear a confirmation tone.

- 1. To review stored numbers, press the memory button, and use the cid/vol (- or +) NOTE: Press the *EXIT key to return to the standby mode. button to scroll to the memory location, or press the corresponding number key for a
 - desired memory location (0-9). 2. When the data shows in the display, press the DELETE/Channel button. The display
 - shows DELETE? 3. Press DELETE/Channel again to delete the data. The display shows DELETED.

Dialina a Stored Number

- 1. Make sure the phone is **ON** by pressing the TALK/CALL BACK button.
- 2. Press the Memory button.
- 3. Press the memory location (0-9). The number dials automatically.
- 1. Make sure the phone is **OFF** (not in TALK mode).
- 2. Press the Memory button.
- 3. Use the touch-tone pad or the cid/vol (or +) button to scroll to the number you want to dial
- 4. Press the TALK/CALL BACK or SPEAKER button. The number dials automatically

Chain Dialing from Memory

Use this feature to make calls which require a sequence of numbers, such as calling card calls to a frequently called long distance number. Each part of the sequence is dialed from memory. The following example shows you how to use chain dialing to make a call through a long distance service:

The Number For	Memory Location
Long distance access number	7
Authorization code	8
Frequently called long distance number	9
1. Make sure the phone is ON (in TALK or SPI	EAKERPHONE mode).

- 2. Press the Memory button and then press 7.
- 3. When you hear the access tone, press the Memory button and then press 8.
- 4. At the next access tone, press the Memory button and then 9.

TIP: Wait for the access tones before pressing the next Memory button, or your call may not go through.

the microphone to approximately two to three inches from your mouth.

Headset and Belt Clip

Connecting an Optional Headset to the Handset

- For hands free operation:
- 1. Remove the rubber cap covering the headset jack. 2. Connect the headset to the headset jack on the handset. The handset receiver is
- disabled when the headset is connected. 3. Adjust the headset to rest comfortably on top of your head and over your ear. Move
- 4. Press the TALK/CALL BACK button on the handset to answer a call or make calls with
- 5. To return to normal operation, unplug the headset from the jack.

Attachina the Belt Clip

To attach the belt clip, insert the sides of the belt clip into the slots on each side of the handset. Snap the ends of the belt clip into place.

Changing the Battery

Make sure the telephone is **OFF** (not in TALK mode) before you replace battery.

- 1. Remove the battery compartment door.
- 2. Disconnect the cord attached to the battery pack and remove the battery pack from
- 3. Insert the new battery pack and connect the cord to the jack inside the battery compartment.
- 4. Put the battery compartment door back on.
- 5. Place handset in the base to charge. Allow the handset battery to properly charge (for 16 hours) prior to first use or when you install a new battery pack. If you do not properly charge the phone, battery performance will be compromised.
- CAUTION: To reduce the risk of fire or personal injury, use only the ATLINKS USA, Inc. Nickel-Cadmium battery model 5-2548, which is compatible with this unit.

Battery Safety Precautions

- Do not burn, disassemble, mutilate, or puncture. Like other batteries of this type.
- To reduce the risk of fire or personal injury, use only the **Nickel-Cadmium**
- Keep batteries out of the reach of children. • Remove batteries if storing over 30 days.

battery listed in the User's Guide.

toxic materials could be released which can cause injury



BLOCKED CALL

BLOCKED

NEW

NO DATA

NO CALLS

HINKNOWN

NUMBER

NAME/CALLER/

PAGING

NOTE: The RBRC seal on the battery used in your ATLINKS USA, Inc. product indicates that we are participating in a program to collect and recycle Nickel Cadmium batteries hroughout the United States. Please call 1-800-8-BATTERY or information or contact your local recycling center.

The following messages show the status of the phone or help you set up and use your

NAME/NUMBER	culer hame and hamber is blocked from darishinssion.
DELETE ALL?	Prompt asking if you want to erase all Caller ID records.
DELETE CALL ID?	Prompt asking if you want to erase the current Caller ID record that is shown on the display.
DELETE?	Prompt asking if you want to erase one of the 10 numbers

Caller information is blocked from transmission.

Caller name and number is blocked from transmission

stored in the phone's outgoing memory. DELETED Prompt confirming a CID record is erased

memory locations.

- **EMPTY** Indicates a memory location is vacant. **END OF LIST** Indicates there is no additional information in the Caller ID
- memory log. **ENTER NAME** Prompt telling you to enter a name for one of the 10
- INCOMPLETE Caller information is interrupted during transmission or DATA the phone line is excessively noisy.
- Indicates the handset battery is low and needs charging.
- MESSAGE WAITING Indicates a message is available. Indicates call or calls have not been reviewed.
 - No Caller ID information was received. Indicates no calls have been received.
- Someone is paging the handset from the base. PLEASE REGISTER Indicates the handset needs to be registered before use Indicates the CID number is a Directory Dial Number (DDN)
- PRESS TALK KEY and cannot be formatted. READY Indicates the handset is registered and available for use.
- REPT Repeat call message. Indicates that a new call from the same number was received more than once. TRANSFERRING Indicates the call is being transferred from one handset to
- **UNABLE TO DIAL** Indicates the CID or memory contents cannot be dialed. **UNABLE T** Indicates the CID or memory contents cannot be stored.
- STORE UNAVAILABLE Indicates the handset is out of range.
- Or an additional handset is in use. Or there has been a base power failure, in which case you
 - must place all handsets on the main base cradle for 20 seconds to re-register.
 - The incoming call is from an area not serviced by Caller ID or caller information is not sent

Handset Sound Sianals

Signar	ricannig	
A long warbling tone (with ringer on)	Signals an incoming call	
Three short beeps (several times)	Page signal	
One beep every 7 seconds	Low battery warning	

Troubleshooting Tips Caller ID Solutions

- Fully charge (for 16 hours) or replace the battery.
- If you are using AC (electrical) power, make sure that the unit is connected to a non-switched electrical outlet. Unplug the AC power converter from the unit and plug it back in
- To see Caller ID information in your display, you must be subscribed to Caller ID service through your local telephone company.

Caller ID incomplete

 The unit displays this message if it detects anything other than valid Caller ID information during the silent period after the first ring. This message indicates the presence of noise on the line.

Telephone Solutions Handset can not link

• If any handsets become inoperable, place it on the main base cradle for 20 seconds to re-registe

No dial tone

- Check or repeat installation steps • Make sure the base power cord is connected to a working electrical outlet.
- Make sure the telephone line cord is connected to the base unit and the modular phone jack?
- Disconnect the base from the wall phone jack and connect another phone to the same jack. If there is no dial tone on the second phone, the problem might be your wiring or local service.
- The handset might be out of range of the base. Move closer to the base.
- Make sure the battery is properly charged (for 16 hours).
- Ensure the battery pack is installed correctly.
- Did the handset beep when you pressed the TALK/CALL BACK button? Did the in use indicator come on? The battery may need to be charged

Handset does not ring

- Make sure the handset is set to ON, this can be done through the handset setup menu Ringer Volume.
- You may have too many extension phones on your line. Try unplugging some phones.
- See solutions for "No dial tone."

Charge/in use indicator on the base flashes

 Provided your phone company offers voice messaging service and you subscribe to it, the charge/in use indicator on the base flashes when the phone is not in use to indicate there is a message waiting. It stops flashing after the message has been reviewed.

You experience static, noise, or fading in and out Change channels

- The handset maybe out of range. Move closer to the base.
- Relocate the base.
- Charge the battery
- Make sure base is not plugged into an electrical outlet with another household appliance.

Unit beens

- Place handset in base cradle for 20 seconds to reset the security code. If that doesn't work, charge the battery for 16 hours. See solutions for "No dial tone."
- Replace the batters

Memory dialing

- Make sure you correctly program the memory location keys.
- Make sure you follow the proper dialing sequence.

• You may need to reprogram numbers into memory after a power outage or

Out of range

Move closer to the base

Phone won't dial out with pulse service

• An additional handset is in use.

Handset displays UNAVAILABLE

Move closer to the base

• Foil backing on insulation.

Handset battery is low.

• You're out of range of the base

Aluminum sidina.

• Make sure phone is in tone dialing mode.

Make sure phone is in pulse dialing mode.

Place the handset on the main base for reset.

Causes of Poor Reception

Atmospheric conditions, such as strong storms

• Baby monitor is using the same frequency.

- Reset the battery. Unplug the battery and plug it in again after five seconds.
- Reset the power supply. Unplug the supply and plug it in again after five seconds.

Phone with tone service dials out in pulse mode

• Heating ducts and other metal construction can shield radio signals.

• Base is installed in the basement or lower floor of the house.

• Base is plugged into an AC outlet with other electronic devices.

• You're too close to appliances such as microwaves, stoves, computers, etc.

• Provide you with a new or, at our option, a refurbished unit. The exchange unit is under

What we will do:

- Properly pack your unit. Include any cables, etc., which were originally provided with the product. We recommend using the original carton and packing materials.
- rental firms, proof of first rental is also required. Also print your name and address and a description of the defect. Send via standard UPS or its equivalent to: ATLINKS USA, Inc.
- Pay any charges billed to you by the Exchange Center for service not covered by the

• Customer instruction. (Your Owner's Manual provides information regarding operating

warranty coverage.

scope of this warranty.

How state law relates to this warranty:

may not apply to you.

from state to state

Limitation of Warranty:

instructions and user controls. Any additional information, should be obtained from your

• Please complete and mail the Product Registration Card packed with your unit. It will make

warranties, express or implied (including all implied warranties of merchantability or fitness

ATLINKS USA, Inc., its agents, or employees shall create a guaranty or in any way increase the

for a particular purpose) are hereby disclaimed. No verbal or written information given by

• Repair or replacement as provided under this warranty is the exclusive remedy of the

consumer ATLINKS USA. Inc. shall not be liable for incidental or consequential damages.

resulting from the use of this product or arising out of any breach of any express or implied

warranty on this product. This disclaimer of warranties and limited warranty are governed

by the laws of the state of Indiana. Except to the extent prohibited by applicable law, any

implied warranty of merchantability or fitness for a particular purpose on this product is

• Some states do not allow the exclusion nor limitation of incidental or consequential damages,

or limitations on how long an implied warranty lasts so the above limitations or exclusions

• The warranty stated above is the only warranty applicable to this product. All other

- Batteries.
- **General Product Care** • Products which have been modified or incorporated into other products.
- To keep your telephone working and looking good, follow these guidelines: • Avoid putting the phone near heating appliances and devices that generate **Product Registration:**
- electrical noise (for example, motors or fluorescent lamps). DO NOT expose to direct sunlight or moisture

powder because this will damage the finish.

- Avoid dropping and other rough treatment to the phone.
- Clean with a soft cloth and never use a strong cleaning agent or abrasive
- Retain the original packaging in case you need to ship the phone at a later date.

Service

If trouble is experienced with this equipment, for repair or warranty information, please contact customer service at 1-800-448-0329. If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is

This product may be serviced only by the manufacturer or its authorized service agents. Changes or modifications not expressly approved by ATLINKS USA, Inc. could void the user's authority to operate this product. For instructions on how to obtain service, refer to the warranty included in this guide or call customer service at 1-800-448-0329.

ATLINKS USA, Inc. Manager, Consumer Relations P O Box 1976 Indianapolis IN 46206

during the warranty period.

Or refer inquiries to

Attach your sales receipt to the booklet for future reference or jot down the date this product was purchased or received as a gift. This information will be valuable if service should be required

Purchase date

Name of store

Limited Warranty

What your warranty covers

- Defects in materials or workmanship. For how long after your purchase:
- One year, from date of purchase
- (The warranty period for rental units begins with the first rental or 45 days from date of shipment to the rental firm, whichever comes first.)
- warranty for the remainder of the original product's warranty period. How you get service:

c/o Thomson

11721 B Alameda Ave.

Socorro, Texas 79927

- "Proof of purchase in the form of a bill of sale or receipted invoice which is evidence that the
- product is within the warranty period, must be presented to obtain warranty service." For
- Insure your shipment for loss or damage. ATLINKS accepts no liability in case of damage or
- A new or refurbished unit will be shipped to you freight prepaid.

What your warranty does not cover:

- Installation and setup service adjustments.
- Damage from misuse or neglect
- Products purchased or serviced outside the USA.

• Acts of nature, such as but not limited to lightning damage

it easier to contact you should it ever be necessary. The return of the card is not required for 6. Place the handset in the base to charge.

Extra Charging Cradle



- 2. Place the handset in the extra charging cradle. The charge indicator turns on,
- This warranty gives you specific legal rights, and you also may have other rights that vary

If you purchased your product outside the USA: YOU MUST REGISTER THE HANDSET TO THE MAIN BASE BEFORE USE! • This warranty does not apply. Contact your dealer for warranty information.

Accessory Information

limited to the applicable warranty period set forth above.

landset Replacement Battery 5-2548 ower adapter 5-2501 5-2691 5-2425 (black) Optional/Additional handset cradle 5-2687

MODEL NO

To place order, have your Visa, MasterCard, or Discover Card ready and call toll-free. **1-800-338-0376**. A shipping and handling fee will be charged upon ordering. We are required by law to collect appropriate sales tax for each individual state, country, and locality to which the merchandise is being sent. Items are subject to availability.

Instructions For Optional/Additional

This phone is EXPANDABLE up to a total of 4 handsets (by additional purchase of the optional Model 25901 handset with charge cradle).

another handset is in use, UNAVAILABLE shows on the display.

IMPORTANT: You can only use one handset at a time and there is NO conference and intercom features for these units. If the TALK/ CALL BACK or SPEAKER button is pressed on one handset while



Make sure your package includes the items shown here.

which is compatible with this unit.

Handset


battery pack

NOTE: You must connect the handset battery before use. CAUTION: To reduce the risk of fire or personal injury, use only

the ATLINKS USA, Inc. Nickel-Cadmium battery model 5-2548,

- 1. Locate battery and battery door which are packaged together inside a plastic bag and are separate from the handset.
- 2. Locate the battery compartment on the back of the handset. 3. Plug the battery pack cord into the jack inside the compartment.
- NOTE: To ensure proper battery installation, the connector is keyed and can be inserted only one way.
- 4. Insert the battery pack 5. Close the battery compartment by pushing the door up until it snaps into place.

1. Plug the AC power adaptor of the extra charging cradle into the electrical outlet.



verifying the battery is charging.

Registration

3. Allow the phone to charge for 16 hours.

After the optional handset has charged for 16 hours on the extra charger, place it on the main base station for 20 seconds, it will then automatically register.

NOTE: PLEASE REGISTER shows on the display if the handset has

not been registered. Once a handset has completed registration successfully, READY will show on the handset's display. NOTE: In case of a power failure, the handsets may display

UNAVAILABLE when the TALK/CALL BACK button is pressed. You must then place all handsets on the main base cradle for 20 seconds to re-register.

